

Support pour Relais SP/ST

Socket for SP/ST relay


ESD05000

Screw terminal sockets for use with SPA/SPD and STA/STD/STN solid state


relays compatible with Electromechanical relays, having 5mm pin spacing.

Mounting can be arranged either directly on panel or via DIN-46377 Omega rail. The screw terminals have jaw-type rising clamps offering touch-proof (IP20) protection. Their reduced lateral dimension is ideally suited on high density DIN-rail applications.

An optional plastic retaining spring, acting also as a relay ejecting device (1 model for SP and 1 model for ST) , and a clip-on identification tab are available to complete the series



Dimensions

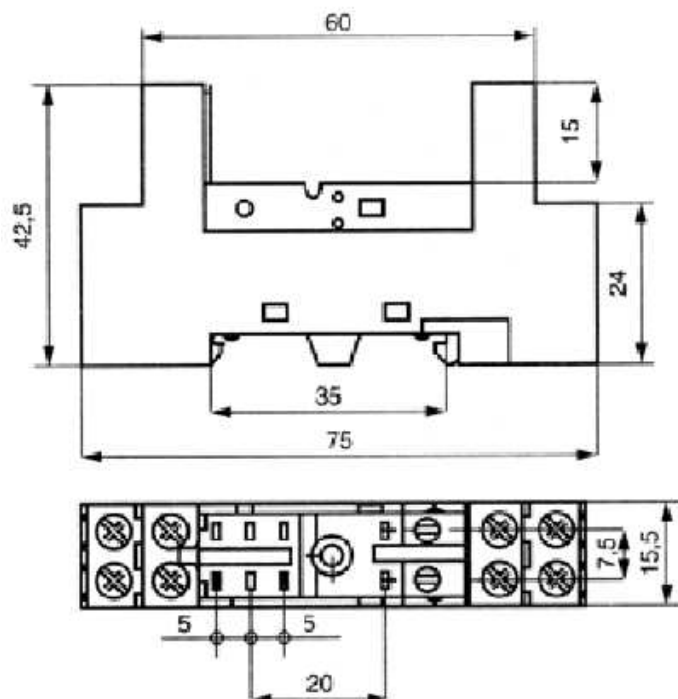

Specifications :
Insulation resistance
Dielectric strength
UL, CSA

12A 250VAC (*)
>1000Mohms
>3KV

(*) see SSR specifications

